

# HARLEQUIN

## ENTRANCE SYSTEMS




REDUCES SLIPS AND FALLS

REMOVES AND TRAPS  
DIRT AND DEBRIS

UNIQUE, DUAL  
WEAVE,  
TWO PASS  
CONSTRUCTION

100% POLYPROPYLENE

LIMITED  
5-YEAR WARRANTY

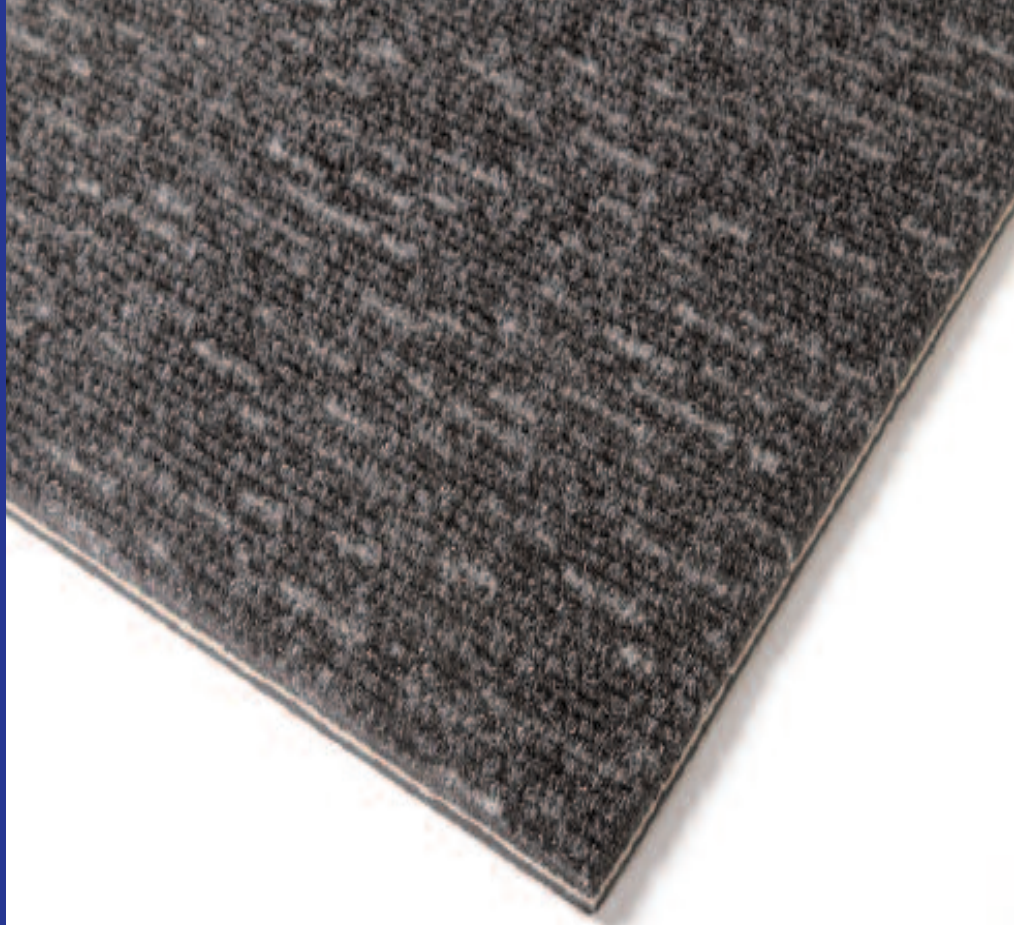

## HARLEQUIN

Harlequin never allows your floors to be damaged by abrasive dirt and debris. One of our newest, most innovative designs, Harlequin is not only fashionable, it's also highly effective in stripping away dirt and water – preventing abrasion and permanent damage to interior floors. Composed of 100% polypropylene, Harlequin creates a more durable, higher-weight primary wear surface. As pleasing to the eye as it is protective of your floors, Harlequin features a dual weave, two pass construction. Tiles can be quarter turned for a random pattern effect. Available in Charcoal, Autumn and Silver.



# HARLEQUIN

## MATERIAL

100% polypropylene denier fibers in 300 oz. Ideally suited for entrance or wall-to-wall applications. This durable and attractive material is specifically designed for your high traffic areas. It scrapes away dirt and debris while keeping maintenance costs low and appearances up.

HEIGHT 1/2"



DENIER 300

BACKING Bitumen, TacFast®

FACE WEIGHT 65 oz

SIZES 19.5" x 19.5" Tiles

COLORS Charcoal, Autumn, Silver

WARRANTY 5 Year Limited Warranty

## MAINTENANCE

The Matworks recommends cleaning your flooring system on a regularly scheduled basis in order to maintain functionality and keep up appearances. The maintenance schedule should be initiated from the date of installation in order to achieve the maximum life expectancy of the product.

**NOTE:** Actual cleaning cycles will depend on store traffic and weather patterns and should be adjusted accordingly.

**Daily:** Vacuum with a rotary brush, preferably with an adjustable head.

**Periodically:** Clean carpet quarterly (or more often depending on traffic levels) using a high performance hot water extraction method. Wet/dry vacuums are recommended for areas with severe weather conditions.

**Stain Treatment:** Treat stain immediately by blotting with a clean dry cloth until no moisture is left on the soiled area. Spray the area with Cleaning Solution, then rub surface with a clean dry cloth. Vacuum carpet tiles after all stain treatments.

**Gum Removal:** Scrape excess gum with a knife or razor blade. Apply gum remover gel and scrape or brush the remaining residue. Follow stain treatment instructions to remove any remaining stain.

Meets the U.S. Flammability Standards

DOC FF1-70 and DOC FF2-70.



ENTRANCE SYSTEMS  
HARLEQUIN

