


MATWORKS

COMPREHENSIVE FLOORING SOLUTIONS


Economical Anti-Fatigue Mats

Double Air, Foot Lover, and Comfort King are three affordable anti-fatigue options that provide comfort for your employees. They are chemical resistant, so they can be placed in various environments. With little variance in price and construction, the available color, surface texture, and thickness options differentiate each product for your needs.


DOUBLE AIR		
Tensile	75 lb/in ² minimum	ASTM D412, <i>DIE C</i>
Elongation	50% minimum	ASTM D412, <i>DIE C</i>
Tear	15 lb/in minimum	ASTM D624, <i>DIE C</i>
Durometer	75 +/- 5, Shore 00	ASTM D2240
Flammability	Pass	DOT FMVSS 302 (Horizontal burn test)
	Pass, <1/2" diameter	CPSC FF 1-70 (Methenamine tablet test)
Suggested Service Temperature	-20°F to +200°F <small>*This range represents the general temperature for most flexible vinyl products</small>	

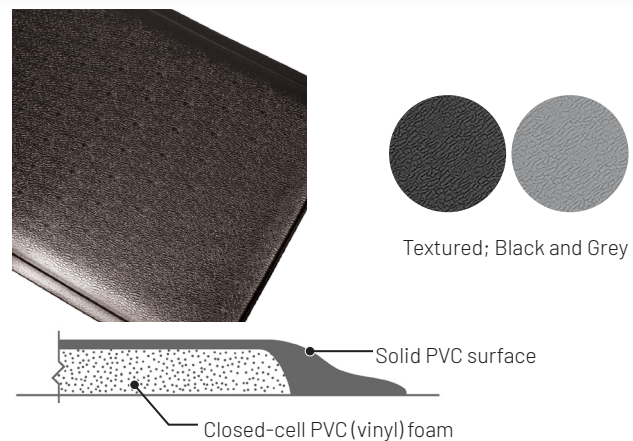

FOOT LOVER		
Tensile	100 lb/in ² minimum	ASTM D412, <i>DIE C</i>
Elongation	100% minimum	ASTM D412, <i>DIE C</i>
Tear	15 lb/in minimum	ASTM D624, <i>DIE C</i>
Durometer	65 +/- 5, Shore 00	ASTM D2240
Flammability	Pass	DOT FMVSS 302 (Horizontal burn test)
	Pass, <1" diameter	CPSC FF 1-70 (Methenamine tablet test)
Suggested Service Temperature	-20°F to +200°F <small>*This range represents the general temperature for most flexible vinyl products</small>	

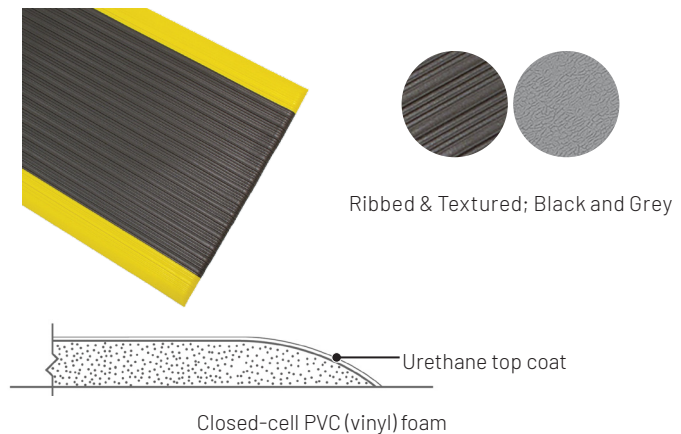

COMFORT KING		
Tensile	100 lb/in ² minimum	ASTM D412, <i>DIE C</i>
Elongation	125% minimum	ASTM D412, <i>DIE C</i>
Tear	20 lb/in minimum	ASTM D624, <i>DIE C</i>
Durometer	65 +/- 5, Shore 00	ASTM D2240
Flammability	Pass	DOT FMVSS 302 (Horizontal burn test)
	Pass, <1" diameter	CPSC FF 1-70 (Methenamine tablet test)
Suggested Service Temperature	-20°F to +200°F <small>*This range represents the general temperature for most flexible vinyl products</small>	

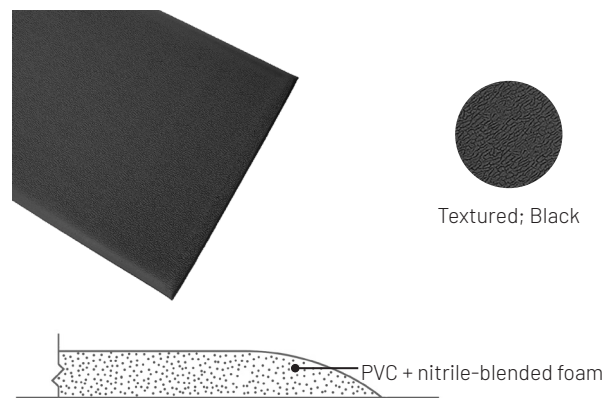

PRODUCT INFO

Specifications - Double Air

Size	Custom sizes are available in widths up to 5'
Embossing	Textured
Color	Black or grey
Customizable	Add custom logo* *Based on order volume
Surface	High-density PVC foam
Backing	Closed-cell PVC sponge
Surface Density	35 lb/ft ³
Thickness	3/8" and 1/2"

Specifications - Foot Locker

Size	Custom sizes are available in widths up to 6'
Embossing	Textured or ribbed
Color	Black or grey
Border	Optional yellow striped border
Material	Closed-cell PCV foam with urethane top coat
Density	18 lb/ft ³
Thickness	3/8", 1/2", and 5/8"

Specifications - Comfort King

Size	Custom sizes are available in widths up to 5'
Embossing	Textured
Color	Black
Material	PVC + nitrile-blended foam
Surface Density	20 lb/ft ³
Thickness	3/8"

Specifications

Installation	Loose laid
Performance	1 year Under high traffic
100% Customer Satisfaction Based on the life of the product	



Made in the
USA



NFSI
HIGH-TRACTION



CLEANING INSTRUCTIONS

- Scrub with a deck brush (as needed) using a detergent with a neutral pH, or rinse with a hose or pressure washer. Hang mat to dry.
- Always make sure the mat is dry before placing it back in service