




MATWORKS

COMPREHENSIVE FLOORING SOLUTIONS

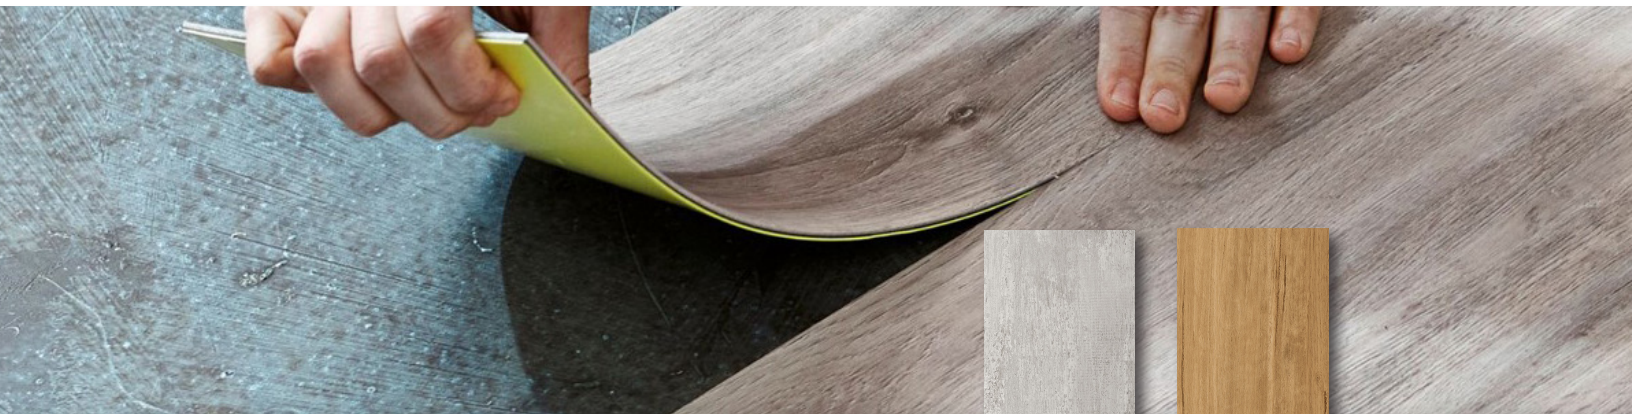


GeckoGrip


LVT/LVP Flooring ASTM F1700



- GeckoGrip flooring features the market's latest innovation in backing technology for luxury vinyl tiles and planks.
- GeckoGrip's microscopic suction cups create a strong, secure bond ensuring it will not shift under heavy foot traffic or rolling loads.
- Eliminating the use of glue allows for quick installation and easy removal and replacement of tiles.
- Available in two sizes, GeckoGrip's array of colors and patterns complement a variety of styles, with the ability to mix-and-match, elevating the look of any room.

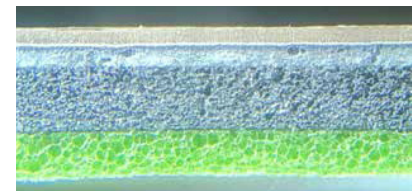


Magnified Cross-Section View



Backing Detail

Rustique (LVP)




Dusty Pearl
506-01




Driftwood
506-03




Beachwood
506-04




Barnwood
514-02



Dauntless Dusk
514-04



Tumbleweed
514-07



Pewter
534-01



Dockwood
446-04

Symphony (LVP)



Harmony
546-02



Cantata
546-04




Opus
546-05




Crescendo
445-05


Royale (LVT)



Renaissance
505A-02



Tapestry
536-04




Baroque
510-07

PRODUCT INFO

GeckoGrip	
Luxury Vinyl Plank (LVP) Size	6" x 48"
Luxury Vinyl Tile (LVT) Size	12" x 24"
Wear Layer	20 mil
Overall Thickness	3.5 mm
Composition	PVC
Finish	EPT Shield + Scratch & Stain Resistant Coating
100% Customer Satisfaction Based on the life of the product	


INSPIRED BY A GECKO'S SUCTION GRIP

GeckoGrip works by using millions of microscopic suction cups, negatively charged fluids, and vacuum pressure to bond to any flat, non-porous surface. Eliminating the use of glue allows for easy removal, no residue, and easy replacement by not having to redo the whole floor. Without the release of toxins or solvents from glue, GeckoGrip technology is a more environmentally-friendly choice.



SOUND INSULATING

GeckoGrip's innovative backing technology helps reduce sound transmissions. The 3.5 mm product features a rating of 56 IIC over a 6" slab without a dropped ceiling, providing an optimal solution for reducing sound transmission in all applications.

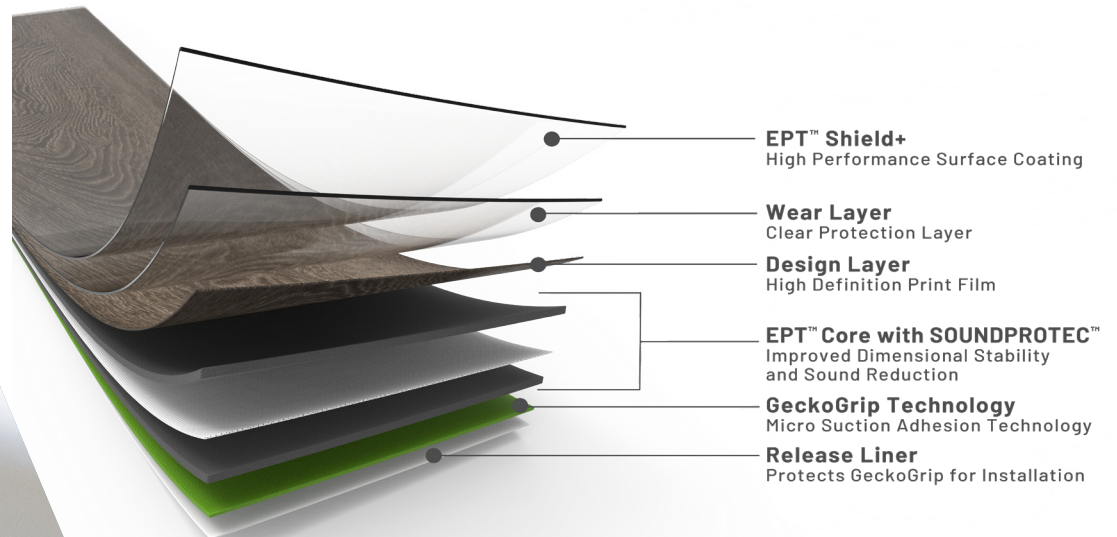

CLEANING INSTRUCTIONS

DAILY OR AS NEEDED:

- Sweep, dust mop, or vacuum the floor to remove all loose dirt and grit.
- Spot clean using a properly diluted neutral pH floor cleaner and a clean cloth.

WEEKLY OR AS NEEDED:

- Scrub using an auto scrubber with a properly diluted neutral pH cleaner and a 3M 5100 Red pad or equivalent pad or brush. Rotary or cylindrical brush cleaning is recommended for textured floors.

SCAN FOR INSTALL GUIDE

