




# MATWORKS

COMPREHENSIVE FLOORING SOLUTIONS

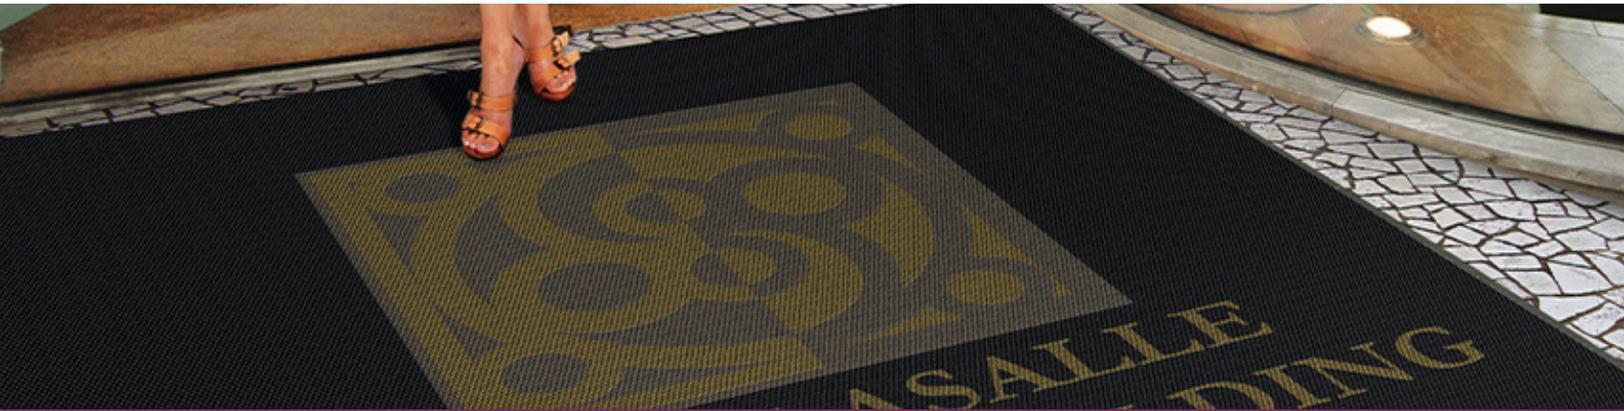

# Diamond Inlay

Indoor/Outdoor Logo Entrance Mat



- Diamond Inlay mats feature your custom logo or message inlaid into an attractive diamond-patterned mat.
- They are ideal for large areas or custom applications.
- The heavy solution-dyed fabric is stain resistant and has excellent light fastness making them tough enough for heavy foot traffic or outdoor use.
- The high-performance rubber backing helps hold the mat in place to minimize slipping hazards.
- Available in 20 colors for mats 6' and smaller, with four background color options for wider mats; all 20 colors can be used for custom logos and messages regardless of size.



Sewn Vinyl Edging



Singed Edging



Bright Red



Burgundy



Solid Red



Orange



Light Yellow



Gold



Dark Brown\*



Light Brown



Sand



Dark Green



Emerald Green



Light Green



Dark Blue



Dolphin Blue\*



Light Blue




Purple



Solid Black\*



Charcoal\*



Grey



White

\*Four background colors are available for widths over 6'

Colors may vary due to inconsistencies of various display monitors. Screen images are intended to be used as a guide only.

# PRODUCT INFO

Specifications	
Material	Solution-dyed polypropylene
Material Weight	52 ounces/yard <sup>2</sup>
Construction	Needle-punched
Design	Diamond
Backing	Performance rubber
Overall Thickness	3/8"
100% Customer Satisfaction Based on the life of the product	

Size(s)
Custom sizes are available in up to 12' widths to and up to 50' in length. Please note that widths over 6' may be seamed based on material availability.
3'
4'
5'
6'
7'
8'
9'
10'
11'
12'
<b>Note:</b> Custom sizes are available to the nearest inch.

Design Specifications	
Diamond Inlay mats are produced using an inlay process, where colored material is cut and pieced together by hand before pressing into rubber. As a result, there are very strict design requirements for this product. PMS color matching is not available	
Minimum Text Height	3"
Minimum Line Thickness	3/8"
Any space between letters or design elements must be at minimum 3/8". The text requirements are for general use; however, special fonts and very thin letter forms may need to be made larger or thicker and will be approached on a case-by-case basis.	
Gradients, tints, screens, and transparencies are not supported and should not be used.	



## CLEANING INSTRUCTIONS

- Vacuum regularly: daily in high-traffic areas, weekly in lower-traffic applications.
- Extract or hose off as needed to remove heavy soil and debris.
- Always make sure the mat is dry before placing back into service.